


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

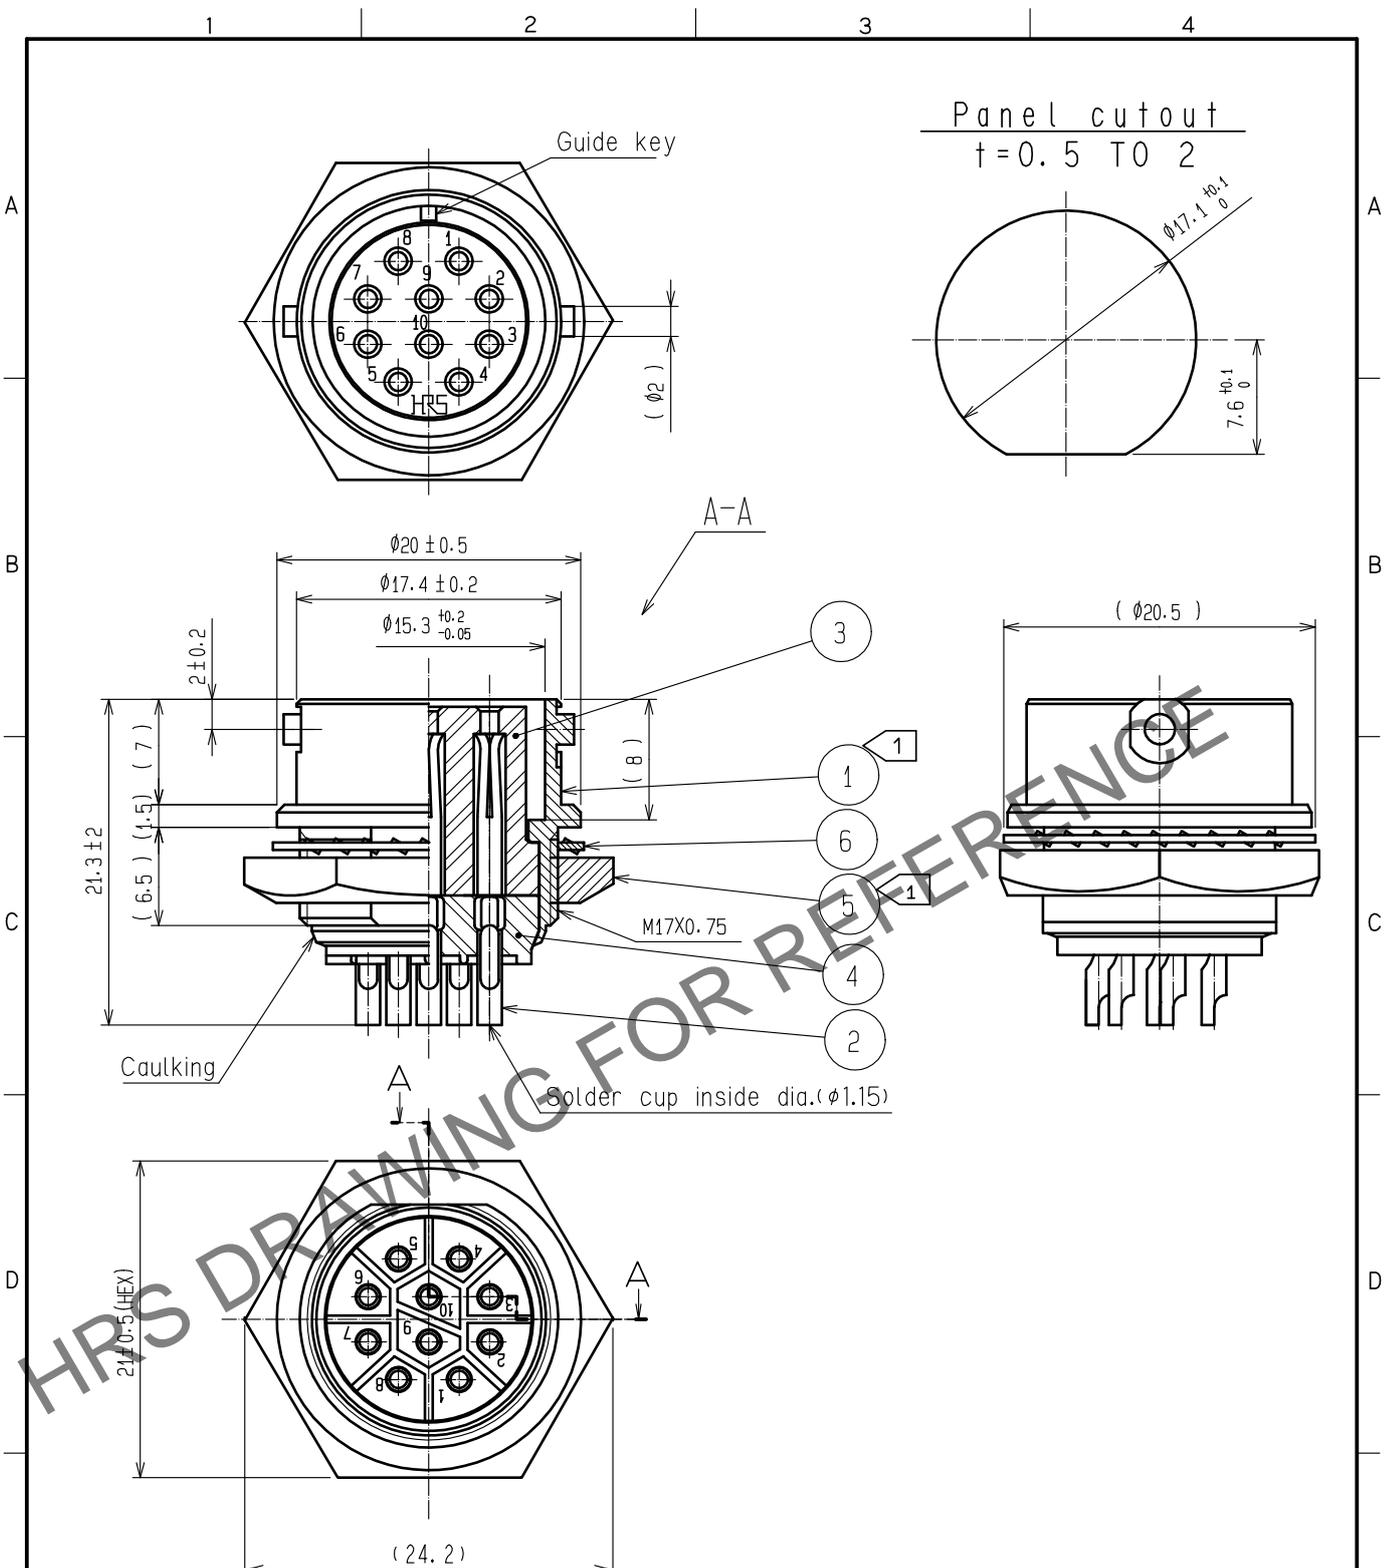

Note ⑤ The tightening torque of Ref No. ⑤ : 3 to 4 N · m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating		
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating		
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED :HY. KOBAYASHI	20221227	DRAWING NO.	EDC-021751-81-00		
		CHECKED :HY. KOBAYASHI	20221227	PART NO.	RM15QRD-10S(81)		
		DESIGNED :HT. ZENBA	20221227	CODE NO.	CL0109-0779-8-81		
		DRAWN :KR. SUZUKI	20221227				